

LineStop Machines


Actuator I HYD

Description

Hydraulic Linestop Actuator 4" - 12"

Specifications

Mating Flanges:	Special "O" ring flange
Maximum Working Pressure:	102 barg (1480 psig) @ 82.2 °C (180 °F)
Maximum Working Temperature:	121.2 °C (250 °F) @ 55.16 barg (800 psig)
Overall Dimensions (retracted):	1829 x 360 x 185 mm (72 x 14 x 7.5 in.)
Overall Dimensions (extended):	3440 x 360 x 185 mm (136 x 14 x 7.5 in.)
Weight:	135 kg (297lb)
Product Groups:	Liquid or Gas

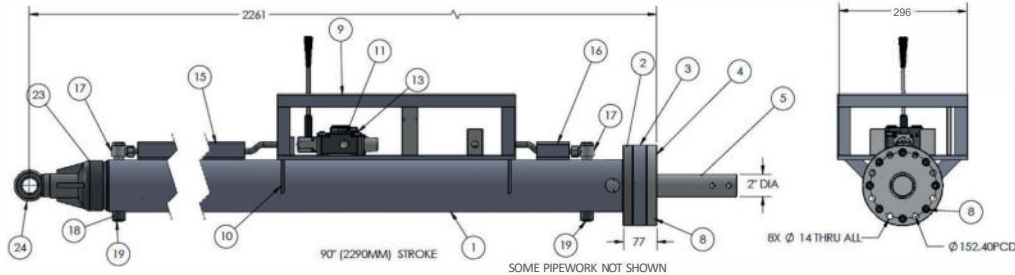

ITEM N°	DESCRIPTION	MATERIAL	QTY.
1	4 INCH CYLINDER 72 N STROKE	E355	1
2	4 N RAM CYLINDER FLANGE 152.4 PCD	SA516GR70	1
3	4 N RAM SEAL INSERT	070M20	1
4	4 N RAM WIPER FLANGE 152.4 PCD	SA516GR70	1
5	4 N RAM PISTON ROD ASSY	20 Mh V6 CHR PL	1
6	4 N RAM CLAMPING RING	SAE660	1
7	B 18.3.IM-8 x 1.25 x 35 Hex SHCS-35 SHZ	12.9HT	1
8	B 18.3.1 M- 10 x 1.5 x 65 Hex SHCS - 32 SHZ	12.9HT	8
9	HIDRAULICS FRAME	40x40x4 RSA MAT 5275	8
10	4 N RAM FRAME SUPPORT LEGS	5275	4
11	SD5 HYD VALVE	WALVOIL	1
12	B 18.3.1 M- 4 x 0.7 x 10 Hex SHCS - 10 SHZ	12.9HT	8
13	B 18.3.IM-8 x 1.25 x 55 Hex SHCS-28 SHZ	12.9HT	3
14	BLANKING PLUG 1_2 INCH		2
15	4 N RAM 1060 LG GUARD	5235	1
16	4 N RAM 75 LG GUARD	5235	1
17	3_8IN BANJO		2
18	1_2 INCH SOCKETS FOR 4 N ACT		2
19	1_2 INCH BLANKING PLUG	070M20	2
20	EYE	AA75	1
23	GASUNIE4 N CAPASSY	ASTMA234WPB	1
24	M24 LIFTUG EYE		1